

BEST AVAILABLE COPY

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
26 May 2005 (26.05.2005)

PCT

(10) International Publication Number
WO 2005/046496 A1

- (51) International Patent Classification⁷: **A61B 18/12**
- (21) International Application Number:
PCT/US2003/037310
- (22) International Filing Date:
21 November 2003 (21.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/515,816 30 October 2003 (30.10.2003) US
- (71) Applicant (for all designated States except US): **SHERWOOD SERVICES AG** [CH/CH]; Bahnhofstr.29, CH-8200 Schaffhausen (CH).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **WHAM, Robert Hartzell** [US/US]; 705 Yale Road, Boulder, CO 80305 (US). **STURM, Thomas, A.** [US/US]; 795 Pope Drive, Erie, CO 80516 (US).
- (74) Agents: **DENNINGER, Douglas, E. et al.**; Tyco Healthcare Group, LP, 150 Glover Avenue, Norwalk, CT 06850 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **AUTOMATIC CONTROL SYSTEM FOR AN ELECTROSURGICAL GENERATOR**

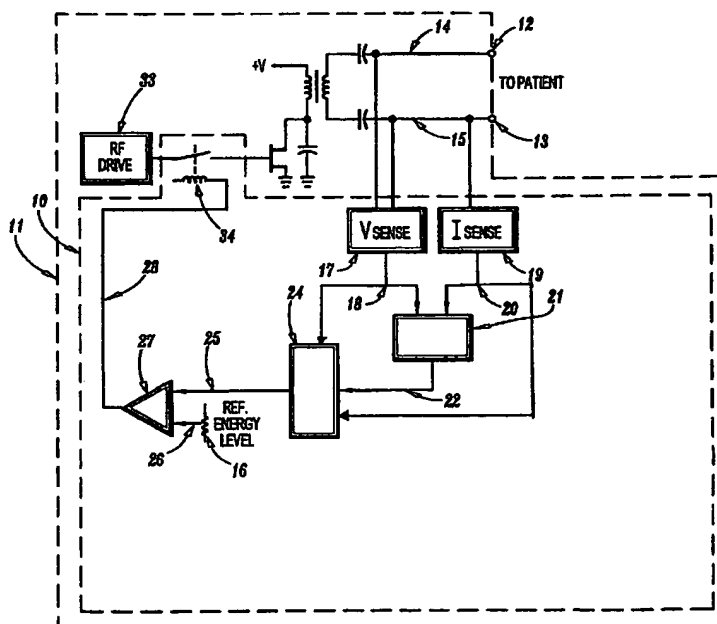

(57) Abstract: An automatic control system for an electrosurgical generator is herein disclosed. The automatic control system includes voltage and current sensing circuits, a processing circuit, an output determining circuit, and a control circuit. Samples of the voltage and current outputs are supplied to the processing circuit and the output determining circuit to generate an output signal. The output signal is compared to a reference signal to generate a feedback signal for controlling a drive circuit.

WO 2005/046496 A1

**AUTOMATIC CONTROL SYSTEM FOR
AN ELECTROSURGICAL GENERATOR**

5 **CROSS REFERENCE TO RELATED APPLICATIONS**

The present application claims the benefit of and priority to U.S. Provisional Patent Application No. 60/515,816, filed on October 30, 2003, the entire contents of which are incorporated herein by reference

10 **BACKGROUND OF THE INVENTION**

1. **Technical Field**

The present disclosure relates to electrosurgery. More particularly, the present disclosure relates to an automatic control system for an electrosurgical generator.

15 2. **Background of Related Art**

Surgeons have tried to deal with energy application by adjusting the basic power level of the electrosurgical generator and using a hand or foot switch to control the power applied over time. Unfortunately, that technique often leads to unintended power delivery or undesired duration of power delivery to the surgical site. Surgeons also experience difficulty in repeatably and/or consistently desiccating tissue to the desired levels due to the user's reaction time and/or machine response time when manual or foot activated switches are used for manual control. In addition, during endoscopic procedures, visual and tactile feedback is diminished.

25 A circuit for automatically controlling the output of an electrosurgical generator is disclosed in U.S. Patent No. 6,210,403 to Klicek, currently owned, and assigned to Sherwood Services AG, the contents of which are hereby incorporated by reference in its entirety. U.S. Patent No. 6,210,403 relates to an electrosurgical generator control, which is responsive to the tissue impedance between the active and return electrodes during desiccation.

30 A method for tone detection using the Goertzel algorithm is disclosed in an article entitled *The Goertzel Algorithm* by Kevin Banks (*The Goertzel Algorithm* by Kevin Banks, <<http://www.embedded.com/showArticle.jhtml?articleID=9900772>>, last visited

on July 24, 2003). The Banks' article relates to using a modified Goertzel algorithm for determining whether a tone of a specific frequency is present. The Goertzel algorithm calculates both the magnitude and the phase of signal at a specific frequency and is functionally equivalent to performing a Discrete
5 Fourier Transform (DFT) at a single frequency, but is much less computationally demanding. The DFT is a method for calculating the magnitude and phase of a band of frequencies of interest. An N-point DFT is computationally demanding, but will calculate the real and imaginary frequency terms for all the frequencies up to half the sampling rate of the signal.

10 According to Banks, using a modified Goertzel algorithm is preferable in applications requiring tone detection such as DTMF, call progress decoding, and frequency response measurements. However, the modified Goertzel algorithm proposed by Banks does not provide the real and imaginary frequency components of the sampled waveform. As a result, the modified
15 Goertzel algorithm is unsuited for determining the phase of the waveform.

It is an object of the present disclosure to provide an automatic control system that uses fewer computational steps.

Another object of the present disclosure is to provide an automatic control system that measures the power delivered to a patient.

20 Yet a further object of the present disclosure is to provide an automatic control system that is adaptable to both monopolar and bipolar electrosurgical generator configurations.

It is a further object of the present disclosure to provide an automatic control system that adjusts the power delivered to a patient by an
25 electrosurgical generator.

SUMMARY

The present disclosure relates to an automatic control system for an
30 electrosurgical generator which includes voltage and current sensing circuits, a processing circuit, an output determining circuit, and a control circuit. The voltage and current sensing circuits produce voltage and current signals that

are representative of the voltage and current present in the output of the electrosurgical generator. Advantageously, these signals are coupled to the processing circuit that uses a Goertzel algorithm to determine the phase difference between the voltage waveform and the current waveform according to circuitry within the processing circuit.

Preferably, the processing circuit produces a phase difference signal that is communicated to the output determining circuit for determining the output of the electrosurgical generator. The output determining circuit produces an output signal that is compared to a reference signal in the control circuit. Advantageously, the control circuit determines the difference between the output signal and the reference signal and generates a feedback signal that is representative of the difference. The feedback signal is communicated to a drive control circuit for controlling the output of a drive circuit.

Preferably, the Goertzel algorithm determines phase angle between the voltage waveform and the current waveform. Advantageously, the phase angle is used to compensate for energy delivery at the operating site. It is also contemplated that the phase angle can be utilized to provide feedback to the generator about tissue relating to at least one of: tissue change over time, tissue impedance, tissue type, tissue cycle completion.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the presently disclosed are described herein with reference to the drawing, wherein:

FIG. 1 is block diagram of an automatic control system for an electrosurgical generator in accordance with an embodiment of the present disclosure.

DETAILED DESCRIPTION

Embodiments of the presently disclosed automatic control system will now be described in detail with reference to the drawing where, in FIG. 1, an

exemplary embodiment of the presently disclosed automatic control system 10 is illustrated. Automatic control system 10 is ideally disposed within an electrosurgical generator 11. Electrosurgical generator 11 includes a user control 16 preferably on its front panel accessible to the doctor for setting the output level desired for a particular electrosurgical procedure. User control 16 may be a knob, a slider, or other structures and/or devices as is known in the art for use by the doctor to set a reference signal 26 indicative of the desired output.

A voltage sensing circuit 17 has an isolation transformer, which acts as an inductive pickup. Its primary side is electrically connected between leads 14 and 15 for inducing a voltage signal 18 on the secondary windings thereby responding to the high frequency electrosurgical energy supplied by electrosurgical generator 11 flowing through leads 14 and 15. A current sensing circuit 19 responds to high frequency electrosurgical energy supplied by electrosurgical generator 11 and flowing through return lead 15. Current sensing circuit 19 provides a current signal 20 as an instantaneous output representative of the current passing therethrough. Preferably, voltage signal 18 and current signal 20 are AC waveforms that are representative of the output of leads 14 and 15.

Operatively connected to leads 14 and 15 are electrodes 12 and 13. Electrodes 12 and 13 are used to provide the output of electrosurgical generator 11 to a patient. In a bipolar configuration, electrodes 12 and 13 are both present in an electrosurgical instrument (not shown), which is used at a surgical site of the patient with electrode 13 providing the return path for the output of electrosurgical generator 11.

In a monopolar configuration, the electrosurgical instrument (not shown) includes one electrode 12 while electrode 13 is connected to a surface near the patient and provides the return path. The active ends of electrodes 12 and 13 are electrically connected to electrosurgical generator 11 by one or more conductive cables. Although monopolar and bipolar configurations are used in electrosurgical generators, they are electrically equivalent and equally suited for use with automatic control system 10 of the present disclosure.

Voltage sensing circuit 17 and current sensing circuit 19 are operatively coupled to a processing circuit 21. In a preferred embodiment, processing circuit 21 includes one or more digital signal processors (DSP) and associated circuitry. The DSPs may be upgradeable using flash ROM as is known in the art. Upgrades for the DSPs may be stored on computer readable media such as magnetic disks, optical disks, magnetic tape, or other media as is known in the art. Processing circuit 21 simultaneously receives voltage signal 18 and current signal 20.


In a preferred embodiment, processing circuit uses the Goertzel algorithm for processing voltage and current signals 18, 20. The Goertzel algorithm is advantageously implemented as a second order recursive infinite impulse response filter, as shown below.

The Goertzel algorithm is defined by the equation :

$$H_{f_i}(z) = \frac{1 - e^{-j2\pi f_i/f_s} z^{-1}}{1 - 2 \cos\left(\frac{2\pi f_i}{f_s}\right) z^{-1} + z^{-2}}$$

Where f_i is the frequency of interest and f_s is the sampling frequency.

Second Order Recursive Goertzel Filter

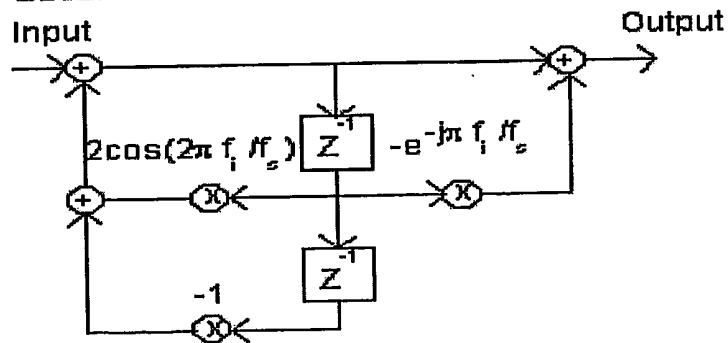

The Goertzel algorithm is implemented digitally as:

$$v_k[n] = x[n] + 2 \cos\left(\frac{2\pi k}{N}\right) v_k[n-1] - v_k[n-2]$$

Since the output frequency of electrosurgical generator 11 is known, and preferably, about 470 KHz, the digitally implemented Goertzel algorithm calculates the real and imaginary frequency components of the known

5 waveform using the following formulae:

$$\text{Real} = (v_k [n-1] - (v_k [n-2] * \cos (2\pi k/N)))$$

$$\text{Imaginary} = (v_k [n-2] * \sin (2\pi k/N))$$

$$\text{Magnitude} = \text{square_root} (\text{Real}^2 + \text{Imaginary}^2)$$

$$\text{Phase} = \text{ATAN} (\text{Imaginary}/\text{Real})$$

10

The DSPs of processing circuit 21 calculates the Voltage_Phase for voltage signal 18 and the Current_Phase for current signal 20 according to the above-mentioned formulae. Additionally, the phase shift, preferably in radians, between voltage signal 18 and current signal 20 can then be calculated by

15 applying the algorithm on voltage signal 18 and current signal 20 concurrently and subtracting the difference in the phases as follows:

$$\text{Phase_Difference} = \text{Current_Phase} - \text{Voltage_Phase}.$$

This phase calculation is implemented to calculate the phase differential between voltage signal 18 and current signal 20. In the preferred embodiment,

20 the DSPs of processing circuit 21 include the Goertzel algorithm along with associated processing software to determine the phase difference between voltage signal 18 and current signal 20. Additionally, processing circuit 21 determines a magnitude value of both voltage and current signals 18, 20 and communicates these values along with the Phase_Difference to an output

25 determining circuit 24 as phase difference signal 22.

In one embodiment, output determining circuit 24 includes a microprocessor with associated circuitry for calculating the dosage (current, power or voltage) output of electrosurgical generator 11 using the calculated Phase_Difference and values of the voltage and current outputs of

30 electrosurgical generator 11. In an AC circuit, power is determined by the formula $P=EI \cos (q)$, where P is the power measured in watts, E is a voltage

value, I is a current value, and q is the Phase_Difference between the voltage and current waveforms.

By advantageously using the Goertzel algorithm for a single known value of frequency, automatic control system 10 of the present disclosure
5 calculates the output for electrosurgical generator 11 using fewer computational steps than a DFT. More particularly, due to the frequency of the output and the selected sampling rate for the voltage and current components of the output, there is insufficient bandwidth to use a DFT to determine the Phase_Difference. However, processing circuit 21, according to the present disclosure, determines
10 the Phase_Difference using the Goertzel algorithm, thereby using fewer computational steps and within the existing bandwidth. As used herein, bandwidth refers to the time between the voltage and/or current samples acquired by voltage and current sensing circuits 17, 19.

Preferably, automatic control system 10 additionally calculates the
15 output of electrosurgical generator 11 and performs any necessary adjustments to the output within the existing bandwidth. In the preferred embodiment, after automatic control system 10 calculates the output and performs any necessary adjustments, there is additional bandwidth available before the next sample of the output is taken. Furthermore, by using fewer computational steps to
20 determine Phase_Difference, a minimum amount of data is lost between samples.

Preferably, the Goertzel algorithm is used to determine the phase angle or Phase_Difference between the voltage waveform and the current waveform. Advantageously, the Phase_Difference is used to compensate for energy
25 delivery at the operating site. It is also contemplated that the Phase_Difference can be utilized to provide feedback to the generator 11 about tissue relating to at least one of: tissue change over time, tissue impedance, tissue type, tissue cycle completion.

Extra bandwidth between samples of the output is advantageously
30 utilized to perform additional calculations, perform additional control functions, or allow the output frequency of electrosurgical generator 11 to be increased. By way of example, such additional calculations include average values of

voltage and current, peak values of voltage and current, and root mean square values of voltage and current. It is contemplated that, additional control functions may include calibration of system components and adjusting system parameters for cable compensation.

5 Output determining circuit 24 includes circuitry for determining electrosurgical generator's 11 output. Preferably, output determining circuit 24 includes a processor and associated circuitry for determining the current, voltage, and/or power delivered to the patient. An output signal 25 is generated by output determining circuit 24 and is coupled to an input of a control circuit
10 27. In a preferred embodiment, voltage and current signals 18, 20 are also communicated to output determining circuit 24. The circuitry in output determining circuit 24 determines the output of electrosurgical generator 11 using voltage and current signals 18, 20 in conjunction with phase difference signal 22. The output of electrosurgical generator 11 is represented by a value
15 of output signal 25.

Control circuit 27 has at least two inputs where a first input is output signal 25 and a second input is a reference signal 26. Reference signal 26 is controlled by the setting of user control 16 and it establishes a reference value for control circuit 27. In a preferred embodiment, control circuit 27 includes at
20 least one DSP and associated circuitry for determining the difference between output signal 25 and reference signal 26. A feedback signal 28 is generated by control circuit 27 where the feedback signal 28 is representative of the difference between output signal 25 and reference signal 26.

Feedback signal 28 is operatively coupled to a drive control circuit 34 for
25 controlling the output of a drive circuit 33. Drive control circuit 34 includes structure and/or circuitry for controlling the output of drive circuit 33. In one embodiment, drive control circuit 34 controls an input to drive circuit 33 for adjusting the output of drive circuit 33 according to a value of feedback signal 28. Alternatively, drive control circuit 34 controls the output of drive circuit 33
30 by adjusting the biasing of associated circuitry in drive circuit 33 according to a value of feedback signal 28, thereby controlling its output.

During operation of electrosurgical generator 11, drive circuit 33 produces an output, or drive signal, that is coupled to a first winding of a transformer. A portion of the output present on the first winding of the transformer is coupled to a second winding of the transformer that is electrically communicated to leads 14 and 15. Leads 14 and 15 are electrically connected to electrodes 12 and 13 for operating an electrosurgical instrument (not shown) during an electrosurgical procedure. The output present on leads 14 and 15 is sampled by voltage sensing circuit 17 and current sensing circuit 19. As discussed in detail above, the Phase_Difference between the output voltage waveform and output current waveform is determined by processing circuit 21 and the output of electrosurgical generator 11 is determined by output determining circuit 24.

As output from electrosurgical generator 11 increases, the values of voltage signal 18 and current signal 20 also increase in a proportional relationship. Output determining circuit 24 receives phase difference signal 22 from processing circuit 21 and determines the change in the output. Accordingly, an increase in output is reflected in an increase in output signal 25 that is coupled to control circuit 27. Due to the increase in output signal 25, the difference between output signal 25 and reference signal 26 decreases resulting in a decreased feedback signal 28.

When output signal 25 is substantially equal to reference signal 26, feedback signal 28 is essentially zero. Additionally, the substantial equality of these signals indicates that electrosurgical generator 11 is producing the desired output for the selected electrosurgical procedure.

Other uses for electrosurgical generator 11 including automatic control system 10 are envisioned to be within the scope of this disclosure. Such applications include procedures where fine control and accuracy of delivered output is desirable. These applications include neurosurgical applications, ligasure sealing, thoracic and throat procedures, ocular surgery, procedures on small structures, and neonatal procedures. The determination of the Phase_Difference will allow output compensation so that with a known cable

and handset, the output delivered to the patient can be more accurately calculated.

Further still, since automatic control system 10 determines the Phase_Difference between the voltage and current components of the output, this information may be coupled with known values of a handset and cable electrical characteristics (i.e. resistance, capacitance, and inductance) to determine the distance between the electrosurgical instrument and the surface of the patient. This is especially advantageous in a coagulation procedure where an electrosurgical generator is used in conjunction with an electrosurgical pencil (i.e. monopolar mode of operation) disposed above the surface of the patient. In this procedure, the electrosurgical generator typically produces a high voltage that arcs from the electrosurgical pencil to the surface of the patient, thereby coagulating affected tissue. By determining the distance between the electrosurgical pencil and the patient, automatic control system 10 can adjust the power output to a desired value that is sufficient to coagulate the affected tissue without producing additional power.

From the foregoing and with reference to the various figure drawings, those skilled in the art will appreciate that certain modifications can also be made to the present disclosure without departing from the scope of the same. For example, Although a Goertzel algorithm is described herein as one low computation algorithm for determining the magnitude and phase components of a narrow band sinusoidal signal, any other algorithm which similarly derives the magnitude and phase components could also be used, such as a 'Fourier Transform', 'Fast Fourier Transform (FFT)' or 'Discrete Fourier Transform (DFT)'. Other similar algorithms which focus on a narrow band of frequencies, will gain the benefit of reduced computational effort similar to the Goertzel implementation.

Although the illustrative embodiments of the present disclosure have been described herein with reference to the accompanying drawings, it is to be understood that the disclosure is not limited to those precise embodiments, and that various other changes and modifications may be affected therein by one skilled in the art without departing from the scope or spirit of the disclosure. All

such changes and modifications are intended to be included within the scope of the disclosure.

WHAT IS CLAIMED IS:

1. A system for controlling an output of an electrosurgical generator comprising:
 - 5 a drive circuit for generating an output, the output being responsive to a feedback signal and operatively coupled to at least one electrode of the electrosurgical generator;
at least one sensing circuit operatively coupled to the at least one electrode for generating at least one signal, the at least one signal
10 corresponding to a value of a waveform present on the at least one electrode;
a processing circuit for receiving the at least one signal, the processing circuit including associated circuitry for determining a value of the at least one signal;
a determining circuit in communication with the processing circuit
15 for generating an output signal, the output signal being representative of the value of the at least one signal; and
a control circuit for generating a feedback signal, the feedback signal representative of a difference between a value of the output signal and a reference value, the feedback signal operatively coupled to the drive circuit.
 - 20
2. A system according to claim 1, wherein the processing circuit includes at least one digital signal processor.
3. A system according to any preceding claim, wherein the at least
25 one digital signal processor includes a Goertzel algorithm.
4. A system according to any preceding claim, wherein the Goertzel algorithm determines phase difference between a voltage waveform and a current waveform.
- 30
5. A system according to any preceding claim, wherein the phase difference is used to compensate for energy delivery at the operating site.

6. A system according to any preceding claim, wherein the phase difference provides feedback to the generator about tissue relating to at least one of: tissue change over time, tissue impedance, tissue type, tissue cycle completion.

5

7. A system according to any preceding claim, wherein the at least one sensing circuit includes a voltage sensing circuit and/or a current sensing circuit.

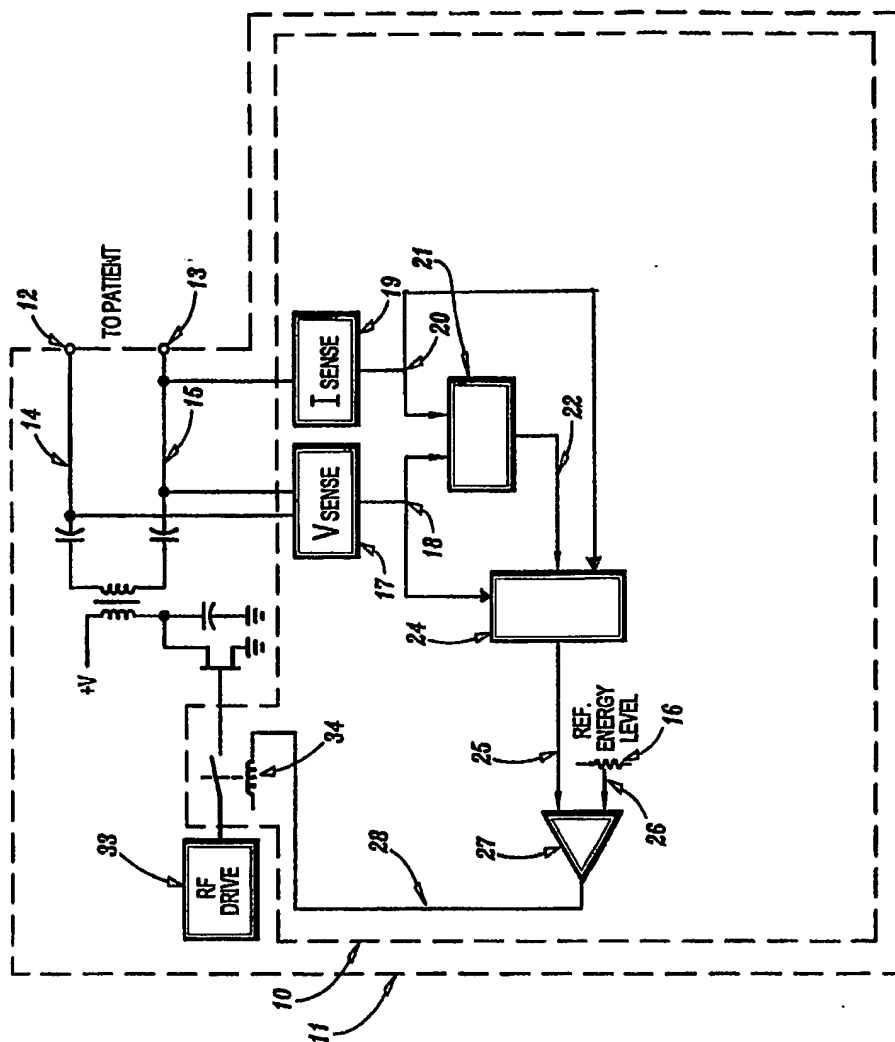


FIG. 1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/37310

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61B18/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 931 836 A (MATSUMOTO HIROAKI ET AL) 3 August 1999 (1999-08-03) abstract; figures 2A,15 column 1, line 50 -column 2, line 53 column 5, line 13 -column 6, line 22 column 11, line 43 -column 12, line 35	1,2,5-7
Y		3,4
Y	CHICHARO J F ET AL: "A sliding Goertzel algorithm" SIGNAL PROCESSING, ELSEVIER SCIENCE PUBLISHERS B.V. AMSTERDAM, NL, vol. 52, no. 3, 1 August 1996 (1996-08-01), pages 283-297, XP004012139 ISSN: 0165-1684 the whole document	3,4

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

6 August 2004

Date of mailing of the international search report

13/08/2004

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Wetzig, T

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/37310

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>OGDEN F: "GOERTZEL ALTERNATIVE TO THE FOURIER TRANSFORM" ELECTRONICS WORLD (INCL. WIRELESS WORLD), REED BUSINESS PUBLISHING, SUTTON, SURREY, GB, vol. 99, no. 1687, 1 June 1993 (1993-06-01), pages 485-487, XP000303838 ISSN: 0959-8332 the whole document</p>	3
A	<p>-----</p>	4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/37310

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5931836	A	03-08-1999	JP 10094545 A JP 10225462 A	14-04-1998 25-08-1998

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)